



SPRAY GUNS & ACCESSORIES FOR CAR REFINISH



BROCHURE





STANDARD




SPLIT NOZZLE





0,05 bar





0,1 bar



0,2 bar



0,3 bar



		PREMIUM Quality <i>Gold</i>		HIGH Quality <i>Silver</i>		STANDARD Quality <i>Bronze</i>	
		Gravity page 4	Pressure page 17	Gravity page 5	Pressure page 17	Gravity page 11	Pressure
Clearcoat		 WS-400 EVO CLEAR	 W-200 WBS1/WB1	 W-400 WBX/BellAria	 W-200 G2P/LV2	 AZ3 HTE2	
Basecoat		 LS-400 ENTECH	 W-200 WBS1/WB1	 W-400 WB2/BellAria	 W-200 G2P/LV2		
Primer		 LPH-300	 W-200 WBS1/WB1		 W-200 G2P/LV2	 Impact AZ3 HTE-S	
Spray Putty						 AZ3 HTE2 HVLP	 Concept AZ3 HTE P.A.S.
Spot Repair		 LPH-80					
Smart Repair		 W-300 WB				 AZ40	
Custom Painting				 RG-3L		 AZ5	

WS-400 evo clear

PREMIUM Quality
Gold

WS-400
evo



with PC-G600P-2
cup 600ml

FEATURES

- Perfect surfaces by Split Nozzle Technology
- High material transfer by a large and uniform spray pattern
- Very fine atomization
- VOC-compliant professional spray gun, significantly more than 65% efficiency
- Clearly visible reduction of so-called fat edges
- Characteristically for ANEST IWATA: quiet and pleasant background noise
- Lightweight and anatomical spray gun body
- Simple operation of the control knobs, for right and left handers
- Conical seal nozzle, minimum wear parts
- Clearer design, easy maintenance
- Quality surface for an easy cleaning
- Compatible with the 3M PPS cup system (Adapter Type 43)

Technical Data	Ø mm	No.	bar	ml/min	Nz/min	mm	mm
WS-400 -1201HD EVO*	1.2 HD*	WS-400-01	2.0	160	356	130 mm	365
WS-400 -1301HD EVO	1.3 HD			220			365
WS-400 -1401HD EVO	1.4 HD			240			370
WS-400 -1501HD EVO	1.5 HD			260		200 mm	370

ORDER INFORMATION



WS-400 evo clear	ø 1,2 HD*	ø 1,3 HD	ø 1,4 HD	ø 1,5 HD
PRO KIT with aircap, nozzle/needle	13244111P	13244122EP	13244124EP	13244126EP
AIRCAP single	93505300			
NOZZLE + NEEDLE single	93505880	93506910	93506920	93506930

*1.2 HD only for special clearcoats



Split nozzle

PRE ATOMIZATION TECHNOLOGY



W-400 WBX classic plus

HIGH Quality
Silver

Classic
plus

WBX









with PCG-6-PE
cup 600ml

FEATURES

- Perfect surfaces by Split Nozzle Technology at its best
- VOC-compliant professional spray gun, significantly more than 65% transfer efficiency
- Very fine atomization
- Clearly visible reduction of fat edges
- Characteristically for ANEST IWATA: quiet and pleasant background noise
- With 380g one of the most lightweight guns on the market
- Conical seal nozzle, minimum wear parts
- Quality surface for an easy cleaning
- Clearer design, easy maintenance
- Compatible with the 3M PPS cup system (Adapter Type 2)

Technical Data

	 Ø mm	 No.	 bar	 ml/min	 l/min	 mm
W-400 WBX-134G	1.3	WBX	2.0	195	370	390
W-400 WBX-144G	1.4			200		
W-400 WBX-164G	1.6			230		

ORDER INFORMATION

W-400 WBX	ø 1,3	ø 1,4	ø 1,6
PRO KIT with aircap, nozzle/needle	13241423P	13241424P	13241426P
AIRCAP single	93622630		
NOZZLE + NEEDLE single	93634610	93628610	93622620



Split nozzle

PRE ATOMIZATION TECHNOLOGY

HIGH Quality
Silver

Classic
plus

BellAria









with PCG-6-PE
cup 600ml

W-400 BellAria classic plus

FEATURES

- High Quality spray gun for fast efficient coating
- Perfect surfaces by new air cap: technology Flat & Thin™
- Only 270 l/min air consumption, giving the sprayer an excellent control of the fluid build
- Stable, large and compact pattern shape

Technical Data

	 Ø mm	 No.	 bar	 ml/min	 l/min	 mm
W-400 -134G	1.3	BA4-2	2.0	220	270	280
W-400 -144G	1.4			250		300
W-400 -164G	1.6			285		330
W-400 -184G	1.8			360		375
W-400 -204G	2.0			375		390

ORDER INFORMATION

W-400 BellAria	ø 1,3	ø 1,4	ø 1,6
PRO KIT with aircap, nozzle/needle	13328513P	13328514P	13328516P
AIRCAP single	93611710		
NOZZLE + NEEDLE single	93611740	93611750	93611760
W-400 BellAria	ø 1,8	ø 2,0	
PRO KIT with aircap, nozzle/needle	13328518P	13328519P	
AIRCAP single	93611710		
NOZZLE + NEEDLE single	93611770	93611780	

LS-400 entech

PREMIUM Quality
Gold

LS-400
entech

Super
NOVA

designed by
pininfarina



with PC-G600P-2
cup 600ml

FEATURES

- Perfect surfaces and finest atomization by Split Nozzle Technology
- Soft spray pattern for easy handling when blending
- High material transfer, maximum material savings
- Large and uniform spray pattern
- Consistent droplet size
- VOC-compliant professional spray gun, significantly more than 65% efficiency
- Characteristically for ANEST IWATA: quiet and pleasant background noise
- Lightweight and anatomical spray gun body
- Simple operation of the control knobs, for right and left handers
- Conical seal nozzle, minimum wear parts
- Clearer design, easy maintenance
- Quality surface for an easy cleaning
- Compatible with the 3M PPS cup system (Adapter Type 43)

Technical Data

	Ø mm	No.	bar		Nl/min	mm	mm	mm
LS-400-1205	1.2 ET	LS-400-05	1.8	150	400	250	350	-
LS-400-1305	1.3 ET			160		250		-
LS-400-ETS13	1.3 ETS			160		235		400
LS-400-ETS14	1.4 ETS			180		235		410
LS-400-ETS15	1.5 ETS			190		240		425

ORDER INFORMATION

LS-400 entech	Ø 1,2 ET	Ø 1,3 ET	Ø 1,3 ETS	Ø 1,4 ETS	Ø 1,5 ETS
PRO KIT with aircap, nozzle/needle	13186521P	13186533P	13186534P	13186545P	13186552P
AIRCAP single	93512100				
NOZZLE + NEEDLE single	93512140	93512160	93512780	93513120	93513140

Ask for proper nozzle setups your distributor or the paint factory.



Split nozzle

PRE ATOMIZATION TECHNOLOGY

WS-400 evo base

FEATURES

- Finest atomization by Split Nozzle Technology; Soft spray pattern for easy handling when blending
- High material transfer, maximum material savings; Large and uniform spray pattern

Technical Data

	Ø mm	No.	bar	mL/min	Nl/min	mm	mm
WS-400 -1301OBS EVO	1.3 OBS	WS-400-01	2.0	160	370	260	365
WS-400 -1301HD EVO	1.3 HD			220		265	
WS-400 -1401HD EVO	1.4 HD			240		270	

• HD (High Delivery) • OBS (Optimised Basecoat Setting)

ORDER INFORMATION

WS-400 evo base	Ø 1,3 OBS	Ø 1,3 HD	Ø 1,4 HD
PRO KIT with aircap, nozzle/needle	13244118EP	13244121EP	13244123EP
AIRCAP single	93505300		
NOZZLE + NEEDLE single	93506850	93506910	93506920

Ask for proper nozzle setups your distributor or the paint factory.

WS-400
evo



with PC-G600P-2
cup 600ml

W-400 WB2 classic plus

HIGH Quality
Silver

Classic
plus



with PCG-6-PE
cup 600ml

FEATURES

- Perfect surfaces by Split Nozzle Technology at its best
- VOC-compliant professional spray gun, significantly more than 65% transfer efficiency
- Very fine atomization, Ideal for blending
- Characteristically for ANEST IWATA: quiet and pleasant background noise
- With 380g one of the most lightweight guns on the market
- Conical seal nozzle, minimum wear parts
- Quality surface for an easy cleaning
- Clearer design, easy maintenance
- Compatible with the 3M PPS cup system (Adapter Type 2)

Technical Data

	Ø mm	No.	bar	ml/min	l/min	mm
W-400 WB-122G	1.2	WB2	1.8	160	390	290
W-400 WB-132G	1.3					300
W-400 WB-142G	1.4					310
W-400 WB-162G	1.6			250		340

ORDER INFORMATION

W-400 WB2	ø 1,2	ø 1,3	ø 1,4	ø 1,6
PRO KIT with aircap, nozzle/needle	13241415P	13241416P	13241417P	13241418P
AIRCAP single	93624620			
NOZZLE + NEEDLE single	93627610	93634610	93628610	93622620



Split nozzle

PRE ATOMIZATION TECHNOLOGY

HIGH Quality
Silver

Classic
plus

BellAria



with PCG-6-PE
cup 600ml

W-400 BellAria classic plus

FEATURES

- High Quality spray gun for fast efficient coating
- Perfect surfaces by new air cap: technology Flat & Thin™
- Only 270 l/min air consumption, giving the sprayer an excellent control of the fluid build
- Stable, large and compact pattern shape

Technical Data

	Ø mm	No.	bar	ml/min	l/min	mm
W-400 -134G	1.3	BA4-2	2.0	220	270	280
W-400 -144G	1.4			250		300
W-400 -164G	1.6			285		330
W-400 -184G	1.8			360		375
W-400 -204G	2.0			375		390

ORDER INFORMATION

W-400 BellAria	ø 1,3	ø 1,4	ø 1,6
PRO KIT with aircap, nozzle/needle	13328513P	13328514P	13328516P
AIRCAP single	93611710		
NOZZLE + NEEDLE single	93611740	93611750	93611760
W-400 BellAria	ø 1,8	ø 2,0	
PRO KIT with aircap, nozzle/needle	13328518P	13328519P	
AIRCAP single	93611710		
NOZZLE + NEEDLE single	93611770	93611780	

LPH-300

PREMIUM Quality
Gold







 with PC-G600P-2
cup 600ml

 opt. PCG 2P-2
cup 200ml

FEATURES

- High material savings because of LVLP technology with split nozzle
- Noticeably low overspray formation
- Extremely low air supply pressure, only 1.0 bar - 1.5 bar
- Very low air consumption, only 200NI/min
- Pleasant lightweight handling
- Due to finer atomization topcoat level suitable for wet on wet (1.4/1.6 mm)
- Characteristically for ANEST IWATA: quiet and pleasant background noise
- Simple operation of the control knobs, for right and left handers
- Conical seal nozzle, minimum wear parts
- Quality surface for an easy cleaning
- Clearer design, easy maintenance
- Compatible with the 3M PPS cup system (Adapter Type 6)

Technical
Data

	 Ø mm	 No.	 bar	 m³/min	 NI/min	 mm
LPH-300 -144LV	1.4	LV4	1.0	90	200	250
LPH-300 -164LV	1.6					
LPH-300 -184LV	1.8			110		

ORDER INFORMATION

LPH-300	ø 1,4	ø 1,6	ø 1,8
PRO KIT with aircap, nozzle/needle	13189043P	13189023P	13189033P
AIRCAP single	93875602		
NOZZLE + NEEDLE single	93862600	93869600	93871600



3M PPS Type 6

*Split nozzle*

PRE ATOMIZATION TECHNOLOGY


LVLP

Low Volume Low Pressure

TECHNOLOGY

further development of HVLP Technology

STANDARD Quality
Bronze

Impact
AZ3 HTE-S

HTE
HIGH TRANSFER
EFFICIENCY









with PCG-6P-2-AZ
cup 600ml

FEATURES

- Robust filler spray gun
- Flat&thin spray pattern with a fine atomization
- All wetted parts in stainless steel
- Trigger easy to dose
- Simple operation of the control knobs, for right and left handers
- Costs for replacement of spare parts extremely customer friendly
- Compatible with the 3M PPS cup system (Adapter Type 43)

Technical Data

Technical Data						
	Ø mm	No.	bar	ml/min	Nl/min	mm
AZ3 HTE-S IMPACT	1.4	HTE-S1	2.5	290	375	230
	1.6	HTE-S2		300	362	
	1.8			335		270
	2.0			375		

ORDER INFORMATION

Impact AZ3 HTE-S	ø 1,4	ø 1,6	ø 1,8	ø 2,0
GUN with aircap, nozzle/needle	W0SPG90AG14C	W0SPG90AG16C	W0SPG90AG18C	W0SPG90AG20C
AIRCAP single	W2CAP90AG12	W2CAP90AG16		
NOZZLE + NEEDLE single	W2ADU90AG14	W2ADU90AG16	W2ADU90AG18	W2ADU90AG20



HTE
HIGH TRANSFER
EFFICIENCY

HTE-S
High Performance Spray
TECHNOLOGY
Homogeneous and fine atomization



3M PPS Type 43

AZ3 HTE2 HVLP *Air-Cure* ANEST IWATA Group

STANDARD Quality
Bronze

HTE 2
HIGH TRANSFER
EFFICIENCY



with PCG-6P-2B-AZ
cup 600ml









3M PPS Type 43



FEATURES

- Robust work spray gun for materials with high viscosity
- Trigger easy to dose
- Simple operation of the control knobs, for right and left handers
- Costs for replacement of spare parts extremely customer friendly
- Compatible with the 3M PPS cup system (Adapter Type 43)

Technical Data

	 Ø mm	 No.	 bar	 ml/min	 l/min	 mm
AZ3 HTE2 HVLP	2.0	HVLP	2.0	240	340	360

ORDER INFORMATION

AZ3 HTE2 HVLP		ø 2,0
GUN HVLP with aircap, nozzle/needle		W0SPG85AG20C
AIRCAP single		W2CAP84AG
NOZZLE + NEEDLE single		W2013031300

STANDARD Quality
Bronze

Concept
AZ3 HTE P.A.S.



with PCGP-6P-2B-AZ
pressure cup 600ml









Air-Cure ANEST IWATA Group

concept AZ3 HTE P.A.S.

FEATURES

- Robust work spray gun with flow pressure
- Large, uniform spray pattern for materials with high viscosity due to Pressure Assisted System (P.A.S.)
- Amazingly high material discharge with high-viscous materials due to direct pressurization
- Costs for replacement of spare parts extremely customer friendly
- High material transfer rate
- All wetted parts in stainless steel
- Precise mini controller for cup flow pressure
- Trigger easy to dose

Technical Data

	 Ø mm	 No.	 bar	 ml/min	 l/min	 mm
AZ3 HTE P.A.S. CONCEPT	1.3	P1 CONCEPT	2.5	190	286	270
	1.5			260		320

ORDER INFORMATION

concept AZ3 HTE P.A.S.		ø 1,3	ø 1,5
GUN with aircap, nozzle/needle		W0SPG88AG13C	W0SPG88AG15C
AIRCAP single		W2CAP83AG13	
NOZZLE + NEEDLE single		W2ADU83AG13	W2ADU83AG15

W-400 classic plus

HIGH Quality
Silver

**Classic
plus**









with PCG-6-PE
cup 600ml

FEATURES

- universal spray gun for industrial coating
- VOC-compliant professional spray gun, significantly more than 65% transfer efficiency
- large and uniformly shaped wet core, even with high viscosity materials
- clearly noticeable reduction in banding

Technical Data

						
W-400-062G	0.8	LV2	2.0	60	280	80
W-400-102G	1.0			95		150
W-400-122G	1.2			100		175
W-400-132G	1.3			160		225
W-400-142G	1.4			210		270
W-400-162G	1.6			240		270
W-400-182G	1.8	LV1	3.0	320	290	260
W-400-202G	2.0	R2		460	360	320
W-400-251G	2.5	W1		360		340

ORDER INFORMATION

W-400	ø 0,8	ø 1,0	ø 1,2	ø 1,3	ø 1,4
PRO KIT with aircap, nozzle/needle	13241401P	13241402P	13241403P	13241404P	13241405P
AIRCAP single	93830610B				
NOZZLE + NEEDLE single	93889610	93890610	93823610	93881610	93831610
W-400	ø 1,6	ø 1,8	ø 2,0	ø 2,5	
PRO KIT with aircap, nozzle/needle	13241406P	13241407P	13241408P	13241409P	
AIRCAP single	93830610B	93859611	93814610B	93813610B	
NOZZLE + NEEDLE single	93832610	93821610	93820610	93819610	

STANDARD Quality
Bronze

HTE 2
HIGH TRANSFER
EFFICIENCY









with PCG-6P-2B-AZ
cup 600ml

3M PPS Type 43

FEATURES

- Robust work spray gun universal for all materials
- Simple operation of the control knobs, for right and left handers
- Compatible with the 3M PPS cup system (Adapter Type 43)

Technical Data

Technical Data	 Ø mm	 No.	 bar	 ml/min	 Nl/min	 mm
AZ3 HTE2	1.0	10-15HTE	2.0	80	200	180
	1.3			140		240
	1.5			160		260
	1.8	18-20HTE		250	215	300
	2.0			300		340
	2.5	25HTE	3.0	450	280	360
	2.8	28-30HTE		540	300	380
	3.0			560		400
	3.5			35HTE		600

ORDER INFORMATION

AZ3 HTE2	ø 1,0	ø 1,3	ø 1,5	ø 1,8	ø 2,0
GUN with aircap, nozzle/needle	W0SPG81AG10C	W0SPG81AG13C	W0SPG81AG15C	W0SPG81AG18C	W0SPG81AG20C
AIRCAP single	W2CAP80AG15			W2CAP80AG18	
NOZZLE + NEEDLE single	W2010133500	W2010133600	W2010133700	W2010133800	W2010133900
AZ3 HTE2	ø 2,5	ø 2,8	ø 3,0	ø 3,5	
GUN with aircap, nozzle/needle	W0SPG81AG25C	W0SPG81AG28C	W0SPG81AG30C	W0SPG81AG35C	
AIRCAP single	W2CAP80AG25	W2CAP80AG30		W2CAP80AG35	
NOZZLE + NEEDLE single	W2010134000	W2010134300	W2010134100	W2010134200	

W-300 WB

PREMIUM Quality
Gold



with PCG 2P-2
cup 200ml
opt. PC-G600P-2
cup 600ml

3M PPS Type 6

FEATURES

- Perfect surfaces by Split Nozzle Technology
- Specifically for blending, for example, side wall or bumper and smaller areas
- Barely visible transitions due to soft and fine spray
- Very fine atomization with low air consumption (190l/min)
- Extremely low material consumption
- Characteristically for ANEST IWATA: quiet and pleasant background noise
- With 320g one of the most lightweight Smart Repair guns on the market
- Simple operation of the control knobs, for right and left handers
- Conical seal nozzle, minimum wear parts
- Clearer design, easy maintenance
- Quality surface for an easy cleaning
- Compatible with the 3M PPS cup system (Adapter Type 6)

Technical Data

	Ø mm	No.	bar	m³/min	Nm³/min	mm
W300 WB-101G	1.0	WB1	1.5	65	190	230
W300 WB-121G	1.2			100		240
W300 WB-141G	1.4			125		250

ORDER INFORMATION

W-300 WB	ø 1,0	ø 1,2	ø 1,4
PRO KIT with aircap, nozzle/needle	13241515P	13241525P	13241505P
AIRCAP single	93592621		
NOZZLE + NEEDLE single	93602620	93591620	93595620

STANDARD Quality
Bronze









with PCG-2P-2B-AZ
cup 200ml
opt. PCG-6P-2B-AZ
cup 600ml

FEATURES

- Robust hobby spray gun for smaller areas
- Very low air requirement, only 130 to 170l/min
- Universal using
- Simple operation of the control knobs, for right and left handers
- Compatible with the 3M PPS cup system (Adapter Type 43)

Technical Data

Technical Data	 Ø mm	 No.	 bar	 m³/min	 Nm³/min	 mm
AZ40	0.8	8	2.5	60	130	100
	1.0	10		90		110
	1.2	12		120		130
	1.5	15		170	140	
	1.8	18		210	200	150
	2.0	20		230		160

ORDER INFORMATION

AZ40	ø 0,8	ø 1,0	ø 1,2
GUN with aircap, nozzle/needle	W0SPG40AG08C	W0SPG40AG10C	W0SPG40AG12C
AIRCAP single	W2CAP41AG12		
NOZZLE + NEEDLE single	W2ADU40AG08	W2ADU40AG10	W2ADU40AG12
AZ40	ø 1,5	ø 1,8	ø 2,0
GUN with aircap, nozzle/needle	W0SPG40AG15C	W0SPG40AG18C	W0SPG40AG20C
AIRCAP single	W2CAP41AG15	W2CAP41AG18	W2CAP41AG20
NOZZLE + NEEDLE single	W2ADU40AG15	W2ADU40AG18	W2ADU40AG20

Air-Cure
ANEST IWATA Group

AZ40

PREMIUM Quality
Gold



with PCG-1P-1
cup 70ml
opt. PCG-3P-1
cup 250ml

3M PPS Type 31

FEATURES

- Especially for small repair jobs and areas, that are hard to reach
- Very fine atomization with low air consumption (60l/min)
- Extremely low material consumption
- Perfect handling when blending
- Characteristically for ANEST IWATA: quiet and pleasant background noise
- With 205g one of the most lightweight Spot Repair guns on the market
- Simple operation of the control knobs, for right and left handers
- Conical seal nozzle, minimum wear parts
- Clearer design, easy maintenance
- Quality surface for an easy cleaning
- Compatible with the 3M PPS cup system (Adapter Type 31)

Technical Data

	Ø mm	No.	bar	ml/min	NL/min	mm
LPH-80-044G	0.4	E4	1.0	10	60	55
LPH-80-064G	0.6			30		80
LPH-80-084G	0.8			45		100
LPH-80-104G	1.0			60		130
LPH-80-124G	1.2			75		140

ORDER INFORMATION

LPH-80	ø 0,4	ø 0,6	ø 0,8	ø 1,0	ø 1,2
GUN with aircap, nozzle/needle	131807072P	131807172P	131807472P	131807272P	131807372P
AIRCAP single	93662600				
NOZZLE single	93570600	93568600	93761530	93560600	93760530
NEEDLE single	93891600	93890600		93886600	



LVLP

Low Volume Low Pressure

TECHNOLOGY

further development of HVLP Technology



SMART REPAIR

SMART REPAIR

Blending or hue adjustment, basecoat is painted over the damaged area and then completely painted with clearcoat,

full coating of small parts such as wheel covers, mirror caps and spoilers.



SPOT REPAIR

SPOT REPAIR

Small refinishing up to a size of about 3.5cm, partial repairs.

PREMIUM Quality Gold



kustom Series

FEATURES

- High End Airbrush spray gun for professionals in kustom painting
- Extreme control of ultra fine-line spray
- Silky-smooth atomization
- Ultimate paint-flow control with hand-tuned, hand-adjusted performance
- Teflon packing, large cups, pre-set handles, taller triggers
- „MAC-System“ air regulation on material output (Micron CM, Hi-Line CH)

ORDER INFORMATION

kustom Series	Cup	ø 0,23	ø 0,30	ø 0,35
kustom Micron CM	14 ml	K 9000	-	-
kustom Revolution TR	21 ml	-	K 9400	-
kustom Hi-Line CH	14 ml	-	K 9100	-
kustom Eclipse CS	14 ml	-	-	K 9300

HIGH Quality Silver



Eclipse Series

FEATURES

- Allround Airbrush spray gun
- Double-Action = independent air and material control
- Paint flow control
- Self-centering nozzle
- Quick change of nozzles without tools
- Easy to clean with plug nozzle
- Also available with a suction cup system (HP-BCS)

ORDER INFORMATION

Eclipse Series	Cup	ø 0,35	ø 0,50
Eclipse HP-CS	9 ml	ECL 4500	-
Eclipse HP-BS	1,8 ml	ECL 2500	-
Eclipse HP-BCS	28 ml	-	ECL 2000

STANDARD Quality Bronze



neo Series

FEATURES

- User friendly pricing attracts new customers to the iwata Airbrush world
- Double-Action = independent air and material control
- Incl. removable cup 7.0ml and 1.8ml or without cup for small quantities 1.0ml
- Also available with a suction cup system (HP-BCN)

ORDER INFORMATION

neo Series	Cup	ø 0,35	ø 0,50
neo HP-CN	2 ml/9 ml	N 4500	-
neo HP-BCN	28 ml	-	N 2000

Deluxe Set

FEATURES

Airbrush deluxe set inclusive

- HP-CS Airbrush gun Eclipse
- IS 850 Smart Jet Compressor
- Quick Fit Set
- Table Top Cleaning Station
- Kit a OPAQUE Primary
- Pistol Grip Moisture Filter
- Lubricant 14ml
- DVD Eddie Young
- Cleaner 112ml
- Freehand Airbrush Template

ORDER INFORMATION

Code	Description
DLXIS850CS	AIRBRUSH DELUXE SET



Starter Kit

FEATURES

Airbrush starter kit inclusive

- HP-CR Airbrush gun Revolution
- IS50 Silver Jet Compressor
- HPA CH 41 Air Hose 1/8-1/8

ORDER INFORMATION

Code	Description
CRIS50BLKDE	AIRBRUSH STARTER KIT



RG-3L

HIGH Quality
Silver









with PC-52 AG
side cup 200ml

FEATURES

- Specifically for decorative paintings with normal nozzles
- Used for modeling, contours painting and graphics
- Fine atomization
- For right and left handers
- With side cup for best control when working
- Individual angle adjustment of the cup, head first working is possible
- Very low air requirement, only 30 to 50NI/min depending on nozzle size
- Conical seal nozzle, minimum wear parts
- Clearer design, easy maintenance

Technical Data

	 Ø mm	 No.	 bar	 m ³ /min	 NI/min	 mm
RG-3L 1	0.4	1	2.5	15	30	25
RG-3L 2	0.6	2		35		35
RG-3L 3	1.0	3		80		

ORDER INFORMATION

RG-3L	ø 0,4	ø 0,6	ø 1,0
GUN with aircap, nozzle/needle	13058606	13058616	13058626
AIRCAP single	93022890	93025880	93026880
NOZZLE single	93042880	93041880	93040890
NEEDLE single	93910880	93937880	93938880

STANDARD Quality
Bronze









with PCG-1P-1B-AZ
cup 70ml

FEATURES

- Robust hobby spray gun for decorative paintings with normal nozzles
- Simple operation of the control knobs, for right and left handers
- Large nozzle selection
- Costs for replacement of spare parts are extremely customer friendly
- Compatible with the 3M PPS cup system (Adapter Type 43)

Technical Data

	 Ø mm	 No.	 bar	 m ³ /min	 NI/min	 mm
AZ5	0.3	3	3.0	19.6	130	100
	0.5	5		26.9		110
	0.8	8		41.6		130
	1.0	10		62.9	170	140

ORDER INFORMATION

AZ5	ø 0,3	ø 0,5	ø 0,8	ø 1,0
GUN with aircap, nozzle/needle	W0018000003	W0018000005	W0018000008	W0010000010
AIRCAP single	W2011140200	W2011140700	W2011140800	W2011140900
NOZZLE + NEEDLE single	W2012330800	W2012330900	W2012331000	W2012331100

Air Gun
ANEST IWATA Group

AZ5

W-200 pressure Series

PREMIUM Quality
Gold

HIGH Quality
Silver

high
T.E.C.
Transfer Efficiency Control

W-200 WB
Split nozzle



W-200
Round nozzle



thumb lever perm. switching



code W-200-X1

thumb lever briefl. switching




code 93895611

lock. fluid adjust screw



code 93605600

lock. pattern adjust screw



code 03841601

fluid tube stainless steel



code W2COM5052

quick coupling with nipple



code DE510004

FEATURES

- High speed operation while maintaining the same surface quality
- VOC-compliant professional spray gun, significantly more than 65% efficiency
- Large and uniform flat&thin spray pattern with fine atomization for large areas
- W-200 WB with Split Nozzle Technology
- W-200 with Round Nozzle
- Characteristically for ANEST IWATA: quiet and pleasant background noise
- With 380g one of the most lightweight pressure spray guns on the market
- Simple operation of the control knobs, for right and left handers
- Conical seal nozzle, minimum wear parts
- Clearer design, easy maintenance
- Quality surface for an easy cleaning
- Combinable with all ANEST IWATA diaphragm pumps and pressure tanks
- Available: fan pattern control for permanently switching and push-pull pattern adjustment set for fast briefly switching



W-200 WB
Split nozzle



W-200
Round nozzle

Technical Data



W-200 Round nozzle

W200-082P	0.8	LV2	2.0	255	360	280
W200-102P	1.0					
W200-122P	1.2					
W200-152P	1.5					
W200-082P	0.8	G2P	3.0	500	560	400
W200-102P	1.0					
W200-122P	1.2					

W-200 WB Split nozzle

W200-WB-081P	0.8	WB(S)1	1.6	200	340	360
W200-WB-101P	1.0	WB(S)1		250		
W200-WB-121P	1.2	WB(S)1		300		
W200-WB-141P	1.4	WB(S)1		350		380

ORDER INFORMATION

W-200	Ø 0,8	Ø 1,0	Ø 1,2	Ø 1,5
GUN G2P with aircap, nozzle/needle	13240505	13240496	13240500	-
GUN LV2 with aircap, nozzle/needle	13240003	13240004	13240100	13240110
AIRCAP G2P single	93818610B			-
AIRCAP LV2 single	93830610B			
NOZZLE + NEEDLE single	93889610	93890610	93891610	93822610

W-200 WB	Ø 0,8	Ø 1,0	Ø 1,2	Ø 1,4
GUN WBS1 with aircap, nozzle/needle	13243250	13243260	13243270	13243280
GUN WB1 with aircap, nozzle/needle	13240800	13240810	13240820	13240821
AIRCAP WBS1 single	93640620			
AIRCAP WB1 single	93609620			
NOZZLE + NEEDLE single	93606620	93612620	93616620	93643620



FEATURES

ANEST IWATA diaphragm pumps in a compact design are the perfect choice for the delivery of liquid media (solvent and water-based paints) for the supply of manual and automatic spray guns.



The reliable pump motor combined with the Double Spool air circuit promises an excellent finish. The pneumatic control system prevents the forced stoppage of the pump (control meets EN12621).

Dead storage material channels and easily collapsible pump structure facilitate cleaning and inspection.

1. supply of manual and automatic spray guns
2. compact stylish design
3. fully pneumatic pump control with Double Spool air circuit
4. individual pump models
5. wear-resistant pump assembly
6. easy inspection and cleaning

- mounted on wheel cart; with paint regulator, 2 air regulators, paint filter unit, fluid recirculation, ball valve with exhaust hole, overpressure valve, dip pipe
- model: stainless steel oder alum. anodized
- also available with a two way connection (Stainless Steel)

MODELS

1		on Stand <ul style="list-style-type: none"> • Dimensions mm: 409 x 358 x 806 • Weight: 13.9kg Stainless Steel • Weight: 10.5kg Alum. anodized
2		on Tank Mount <ul style="list-style-type: none"> • Dimensions mm: 357 x 312 x 798 • Weight: 12.1kg Stainless Steel • Weight: 9.6kg Alum. anodized
3		on Cart with suction pipe <ul style="list-style-type: none"> • Dimensions mm: 437 x 452 x 868 • Weight: 15.5kg Stainless Steel • Weight: 13.0kg Alum. anodized
4		on Wall Mount <ul style="list-style-type: none"> • Dimensions mm: 363 x 214 x 534 • Weight: 12.0kg Stainless Steel • Weight: 9.5kg Alum. anodized
5		on Cart with Hopper <ul style="list-style-type: none"> • Dimensions mm: 526 x 528 x 868 • Weight: 15.5kg Stainless Steel • Weight: 13.0kg Alum. anodized

TECHNICAL DATA

Ratio	1:1	Paint Viscosity	85 sec/Ford#4
Max. Working Pressure	7 bar (100 psi)	Working Temperature	5~40 °C
Fluid Output at 30 cyc/min.	4.5 lt/min	Paint outlet filter	100 mesh
Fluid Output at 200 cyc/min. max.	30 lt/min	Suction paint filter	50 mesh

ORDER INFORMATION

	DPS-120 mounted	Code stainless steel	Code aluminum anodized
1	ON STAND	14069040	14069050
2	ON TANK MOUNT	14069120	14069130
3	ON CART WITH SUCTION PIPE	14069200	14069210
4	ON WALL MOUNT	14069280	14069290
5	ON CART WITH HOPPER	14069360	14069370

Diaphragm Pumps without gun and without air hose set.

Two way connection

	Code
TWO WAY CONNECTION STAINLESS STEEL	04493980

Air hoses


	Code
TWIN HOSE 1/4" - 3/8" 6 MT.	VLPS166GR06B
TWIN HOSE 1/4" - 3/8" 10 MT.	VLPS166GR10B
TWIN HOSE 1/4" - 3/8" 15 MT.	VLPS166GR15B



stainless steel

Pneumatic Agitator - AM-6B

operating pressure: 1-1.5bar,
air consumption: 15 Liter/min,
max. air inlet pressure: 7.0bar



PET-N Series (max. 7.0 bar)

FEATURES

- stainless steel container, polished inside
- PET 10 (10 lt.), PET 30 (30 lt.), PET 50 (50 lt.)
- N: without pneumatic agitator
- MN: with pneumatic agitator
- second material connection (optional)
- no additional lubrication of drive required
- PET 50 N suitable for Euro-Hobbock
- all models conform to ATEX
- max. operating pressure: 7.0bar
- air inlet joint: G 1/4"M; fluid outlet joint: 3/8"M; operating temperature: 5-40 °C
- weight: PET 10 N 15.3kg, PET 10 MN 17.5kg
PET 30 N 20.4kg, PET 30 MN 22.6kg
PET 50 N 25.6kg, PET 50 MN 28.2kg
- dimensions: PET 10 N/MN 540x330mm
PET 30 N/MN 710x415mm
PET 50 N/MN 810x470mm

ORDER INFORMATION

description	without RW Code	with RW Code
PET-N 10 (10 Liter)	14972600	14972620
PET-N 30 (30 Liter)	14972630	14972650
PET-N 50 (50 Liter)	14972660	14972680

PET-10 (max. 4.0 bar)

FEATURES

- paint pressure tank with stainless steel inner tank for easy filling of the appropriate material and a trouble-free interior cleaning
- robust construction
- suitable for hydraulic products
- carry handle for quick and easy transport
- equipped with locking lid, 2 controllers, 2 pressure gauges and safety valve
- conform to ATEX
- max. operating pressure: 4.0bar
- tank capacity: 10 liter, inner tank 8.5 liter stainless steel
- air inlet joint: G 1/4"M; fluid output joint: 3/8"M
- operating temperature: 5-40 °C
- weight: 11kg; dimensions: 310x310x565mm

ORDER INFORMATION

description	Code
PET-10	14972400



stainless steel

INNER TANK
stainless steel

PC-18 D (max. 3.5 bar)

FEATURES

- Small Paint Pressure Tank aluminum; 2 liter
- max. operating pressure: 3.5bar; operating temperature: 5-40 °C
- Fluid Nipple: G 3/8" (PF3/8)

ORDER INFORMATION

description	Code
PC-18 D	14018900
AIR HOSE 1,5 MT.	VLPS166GR150B



single-stage | double-stage | tri-stage

FILTER Single-Stage (Pre filter)



1

FILTER GROUP Double-Stage (Pre & Fine filter)



1

2

FILTER GROUP Tri-Stage (Pre & Fine & Active carbon filter)



1

2

3

FEATURES

- Air Filter Regulator - constructed modular - for dry and clean compressed air
- precise regulation of operating pressure
- with pressure gauge (from 0 bis 10.0 bar)
- with safety quick coupling for a secure connection and disconnection
- removes oil, water, particles and oil vapours/odours; filtration efficiency: 99,9%
- robust and of high quality for a long life
- filter body and bowl treated with anti-corrosion coated
- low-maintenance design
- space saving
- lower installation costs

Technical Specifications

- air inlet: G 1/2"
- air outlet (2 pieces): G 1/4"
- testpressure: 15.0bar
- max. operating pressure: 10.0bar
- max. surrounding temperature: -5 bis 60 °C

1 PRE FILTER

to remove condensate and oil from compressed air and for particle absorption down to 5 µ
5 µ Pre Filter, filtration efficiency: 99%

2 FINE FILTER

for particle absorption down to 0.01 µ
0.01 µ Fine Filter, filtration efficiency: 99,9%

3 ACTIVE CARBON FILTER

to remove oil/oilvapours and odours from compressed air for breathing purposes

ORDER INFORMATION (FILTER & FILTER GROUPS)

Code	Description
D9250112	FILTER SINGLE-STAGE, Pre filter (G 1/2"IG) with pressure regulator, air distribution (2x G 1/4"AG) and safety quick coupling (2x NW 7,2; 1/4" IG)
D9250222	FILTER GROUP DOUBLE-STAGE Pre and Fine filter (G 1/2"IG) with pressure regulator, consumption display, air distribution (2x G 1/4"AG) and safety quick coupling (2x NW 7,2; 1/4" IG)
D9250232	FILTER GROUP TRI-STAGE Pre and Fine and Active Carbon Filter (G 1/2"IG) with pressure regulator, consumption display, air distribution (2x G 1/4"AG) and safety quick coupling (2x NW 7,2; 1/4" IG)

WITH SAFETY QUICK COUPLING



1. STEP: Bleeding
2. STEP: Uncoupling

For safe disconnection with minimum effort with one hand
without the risk of a whip chop.

Air hoses | pressure gauge

PREMIUM



safety quick coupling
Step 1: Bleeding
Step 2: Uncoupling

PREMIUM ANTISTATIC AIR HOSE

FEATURES

High Quality ANTISTATIC AIR HOSE with high-strength synthetic textile braid

Available in 3 different lengths | 6 mt - 10 mt - 15 mt

- Clamped with fittings and safety quick coupling: air hose is vented in a first step and can then be safely disconnected in the second step
- Very light, flexible in itself, noticeably handier
- Conductivity: $R < 10^9 \Omega \text{m}$ EN1953
- Inner diameter $\varnothing 9 \text{ mm}$, outer diameter $\varnothing 15 \text{ mm}$
- Max. operating pressure 15 bar
- Weight with standard length of 10 mt: 1,5 kg



ORDER INFORMATION

Code	Description
00600916P	PREMIUM ANTISTATIC AIR HOSE MOUNTED (6 mt)
001000916P	PREMIUM ANTISTATIC AIR HOSE MOUNTED (10 mt)
001500916P	PREMIUM ANTISTATIC AIR HOSE MOUNTED (15 mt)
W3COM6085	SAFETY QUICK COUPLING NW 7,2; spout $\varnothing 9 \text{ mm}$

Premium antistatic air hose also unmounted available.

STANDARD ANTISTATIC AIR HOSE

FEATURES

flexible Standard ANTISTATIC AIR HOSE

Available in 3 different lengths | 6 mt - 10 mt - 15 mt

- Clamped with fittings and quick coupling
- Inner diameter $\varnothing 9 \text{ mm}$, outer diameter $\varnothing 15 \text{ mm}$



ORDER INFORMATION

Code	Description
00600916	STANDARD ANTISTATIC AIR HOSE MOUNTED (6 mt)
001000916	STANDARD ANTISTATIC AIR HOSE MOUNTED (10 mt)
001500916	STANDARD ANTISTATIC AIR HOSE MOUNTED (15 mt)
W3COM6086	QUICK COUPLING NW 7,2; spout $\varnothing 9 \text{ mm}$

AFV-2 PRESSURE GAUGE

FEATURES

- Air pressure gauge/regulator with quick coupling
- control range 0-6 bar

ORDER INFORMATION

Code	Description
14378630	AFV-2 PRESSURE GAUGE WITH QUICK COUPLING

AFV-2



WITH QUICK COUPLING

Health protection masks



AIRFED 2010 Full face mask

FEATURES

One of the biggest risks to the health of the human body is the inhalation of dust, paint mists, gases, vapors or other contaminants, which can be greatly hazardous to our health, even in small quantities.

For this reason, it is of extreme importance to use masks to protect against respiratory aggressions that you can undergo during job in a saturated environment of toxic substances.

The AIRFED 2010 Full Face Mask is functional and stylish. Suitable for use with previously filtered compressed air. Conforms to the European Standards for light duty.

- Very good all-round visibility with large visor
- Head protection and comfort headband
- Visor with quick-change protection film
- Individually adjustable belt
- Easy to adjust width
- Adjustable fresh air regulator
- Activated carbon filter
- Air indicator
- 1.5m hose (inside diameter 8mm)
- Supplied in Hygienebox



Hygiene BOX

ORDER INFORMATION

Code	Description
VIUAF2010KIT	AIRFED 2010 FULL FACE MASK KIT

VIPER Half face mask



A2P3



FEATURES

The spectrum of action of harmful substances is large and it is necessary to carefully identify the specific risks present in each workplace. The half mask respirators have 2 different ranges of filters that offer effective protection against dust, gases and vapors.

Only wearing protective masks and their correct use can ensure an effective protection of the health against toxic substances.

- Suitable for all paint work
- Full unobstructed field of vision
- Quick bayonet fittings
- Secure fit during use
- Large filter surfaces
- High protection
- Built-in inhalation valves in the filter
- Low inhalation resistance
- Supplied in Hygienebox



Hygiene BOX

ORDER INFORMATION

Code	Description
VMVIPER123	VIPER GUARD MASK with A2P3 Filter

By using the mask a separate goggles is required.



VISIONSHIELD series I Premium overall

VISIONSHIELD SERIE

FEATURES

VISIONSHIELD GOGGLES for wearer of glasses modern and versatile, designed for maximum compatibility with different frame models. These goggles is a good all-round visibility and allows wearing over a variety of prescription.

- Polycarbonate lens and soft rubber frame correspond to the standard 1BT
- High impact resistance for long-term use
- Scratch resistant lens filters out 99.9% of harmful UV radiation
- Resistant to chemical attack

VISIONSHIELD GLASSES

modern with small, stylish strap loins for an excellent fit. Extremely lightweight and comfortable.

- Polycarbonate lenses and frame to ensure high protection
- High impact resistance for long-term use
- Scratch-resistant lens filters out 99.9% of harmful UV radiation
- adjustable nose piece: the soft nose bridge is adjustable and prevents slipping of glasses

ORDER INFORMATION

Code	Description
AGN020-441-3P0	VISIONSHIELD GOGGLES for wearer of glasses
ASA770-15K-4P0	VISIONSHIELD GLASSES



PREMIUM OVERALL

FEATURES

Modern ANEST IWATA Overall from lint-free polyester fabric. Filament yarn woven from carbon for the dissipation of any electrical charge. Antistatic according to EN 1149-1. Flame retardant fabric according to EN ISO 14116: 2008 Index 1 (formerly EN 533). Dirt and water repellent. Reinforced stitching.

- long, concealed 2-way front zipper
- adjustable waist
- removable hood with resizing
- armhole and leg opening with lint microfiber cuffs
- underarm ventilation
- air hose holder on the back
- an inside chest pocket
- two front pockets
- a back pocket with Velcro closure



ORDER INFORMATION

Code	Description	Size
W2COM6336	PREMIUM OVERALL	S (46)
W2COM6337	PREMIUM OVERALL	M (48)
W2COM6338	PREMIUM OVERALL	L (50)
W2COM6339	PREMIUM OVERALL	XL (52/54)

Magnetic supports I Gravity gun holders



MAG STAND Series

FEATURES

- Practical for every bodyshop, fast, flexible and reliable adhesion on all metal surfaces thanks to an extra-strong all-surface magnet
- Hold up to 20 kg (each holder, measured on a clean metal surface) except **2**
- Easy to mount on wall, no screws or drills needed.
- Easy removal before applying the cab protector or equivalent without consuming masking or cutting
- Prevent potential accidents
- Significant space savings in working area

- 1** Magnetic spray gun holder 3 spray guns
 - 32cm x 15cm x 13,5cm
- 2** Magnetic spray gun holder 1 spray gun
 - 8cm x 15cm x 13,5cm
- 3** Magnetic adapter holder for spray guns with adapter
 - universal mounting for all adapters
 - fixing on the magnetic spray gun holder
- 4** Magnetic air hose holder
 - 32cm x 20cm x 14cm

ORDER INFORMATION

Nr.	Code	Description
1	W2COM6052	MAGNETIC SPRAY GUN HOLDER (3 spray guns)
2	W2COM6120	MAGNETIC SPRAY GUN HOLDER (1 spray gun)
3	W2COM6093	MAGNETIC ADAPTOR HOLDER (PPS-RPS)
4	W2COM6094	MAGNETIC AIR HOSE HOLDER

Gravity gun holder


FEATURES

Suitable to hold gravity guns after use or during the filling of the cup.
Available in 2 versions with base:

- 1** Multiple Central Gravity for 3 spray guns
- 2** Single Central Gravity for 1 spray gun (wall mountable)

ORDER INFORMATION

Nr.	Code	Description
1	W2501000500	CENTRAL GRAVITY GUN HOLDER (3 spray guns)
2	W2501000100	CENTRAL GRAVITY GUN HOLDER (1 spray gun) WALL MOUNTABLE

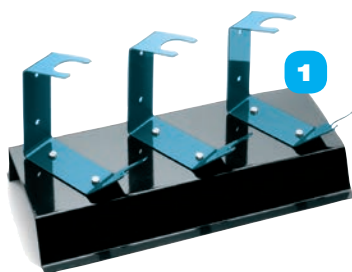

Magnetic spray tester | Demo trolley



Magnetic spray tester

FEATURES

- Portable spray pattern tester for regular monitoring of the spray pattern quality
- Fast, flexible and reliable adhesion of the spray pattern tester on all metallic surfaces thanks to an extra-strong full-surface magnet
- Easy adhesion gives uncomplicated wall mounting – no need for drilling or screws
- Height of the spray pattern tester fast and customizable to each user
- Spray pattern tester lid opens downward for more freedom in the spray pattern test
- Spray pattern tester lid also adheres to all metal surfaces thanks to a further integrated magnet
- Perfect horizontal alignment by an integrated vial in the spray ruler
- Dimensions: 46 cm (B) x 75 cm (H) x 5 cm (T)



ORDER INFORMATION

Code	Description
W2COM6118DEKIT	MAGNETIC SPRAY TESTER with paper block and ruler



DEMO TROLLEY for technicians

FEATURES

- ANEST IWATA Demo trolley as a practical trolley for pulling behind
- incl. containers kit for needles / nozzles and aircaps (22 parts)
- robust and shockproof/dust and waterproof
- flexibly be equipped, also suitable for spray guns and accessories from other manufacturers
- dimensions: 604 (W) x 473 (D) x 283 (H) mm
- weight empty: 9 kg
- IP 67 rating; Material 100% recyclable



7x case with cap for aircap





15x telescopic twist case for nozzle/needle



5x Spray guns

2x small Spray guns
2x Pressure gauge
1x gravity cup 70ml



flexibly be equipped: Gravity cups & Cleaning kits | bulky parts | shapeable foam

ORDER INFORMATION

Code	Description
VPATR-IW01	DEMO TROLLEY with containers kit

Undercoat gun | Sandblasting gun

Air Gun 50
ANEST IWATA Group



1 Liter standard dose

AZ PVA TN Undercoat gun

FEATURES

- robust undercoat gun for the processing of stone chip and underbody protection products
- with suction tube and connection for 1 liter standard doses
- adjustable fluid nozzle for adjustment of material quantity and spray pattern
- air consumption: 322 lt. / min at 6 bar
- 650g



ORDER INFORMATION

Code	Description
W001220000	AZ PVA TN UNDERCOAT GUN

ST for large areas



with 1,5 Meter flexible suction hose

ST1 for small areas



adjustable
nozzle

with 1 Liter aluminium suction cup

ST Series Sandblasting gun

FEATURES

- Sandblasting guns
- ST: with flexible suction hose 1.5 m (air consumption 320 l / min, weight 1.020 grams)
- ST1: 1 liter of AG-1 aluminum suction cup and adjustable nozzle (air consumption 308 lt / min.; weight 780 grams)



ORDER INFORMATION

Code	Description
W0030500050	ST SANDBLASTING GUN ø 5.0mm with air hose
W0030510150	ST SANDBLASTING GUN ø 5.0mm without air hose
W0030500060	ST SANDBLASTING GUN ø 6.0mm with air hose
W0030510160	ST SANDBLASTING GUN ø 6.0mm without air hose
W0030600000	ST1 SANDBLASTING GUN with AG-1 suction cup

AQUADRY Paint Dryer



1



2

FEATURES

- AQUADRY Paint Dryer for drying waterborne basecoat
- Venturi effect increases the volume of air up to six times of the amount of air
- Variable air flow
- 1 single (Paint dryer gun) or
- 2 as a set (2 Paint dryer guns with stand)
 - with stand: each gun can be used independently
 - stand dimensions: H 210cm x B 80cm; stand is continuously adjustable at the side and in height
 - max. operating pressure: 7.0bar; max. air volume: 2x600l/min



ORDER INFORMATION

Code	Description
13908402	AQUADRY Paint Dryer Gun single
UIKIT60100	AQUADRY SET: Stand with 2 Paint Dryer Guns & Fittings

Cleaning Applicator PCA12.0 & HCA12.0 (max. 12.0 bar)

PREMIUM Quality
Gold

PCA12.0
PREMIUM QUALITY Cleaning Applicator



HIGH Quality
Silver



HCA12.0
HIGH QUALITY Cleaning Applicator



FEATURES

- High quality, robust pump spray bottle for quick cleaning of spray guns
- special, adjustable nozzle \varnothing 0.8 mm (nickel-plated brass)
- powerful piston pump (nickel-plated brass) for an operating pressure up to 12.0 bar
- 1 liter capacity with large opening
- level indicator and measurement scale
- perfect stability
- ergonomically shaped handle for easy operation
- **PCA12.0** with solvent-resistant specialty gaskets (BMS 2010 black)
 - for use with aggressive cleaners, resistant to all common solvents
- **HCA12.0** with chemically resistant Viton seals (FKM (Viton) green)
 - for use with mild cleaners, to 95% for cleaning of basecoat

● acids
● alkalis
● solvents
— resistant

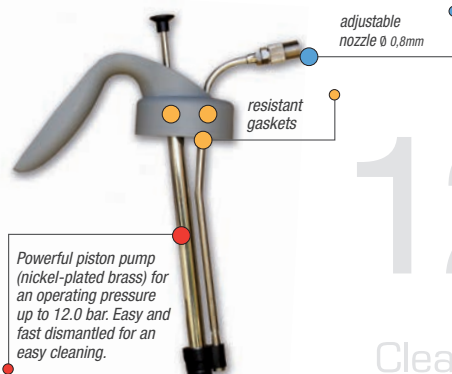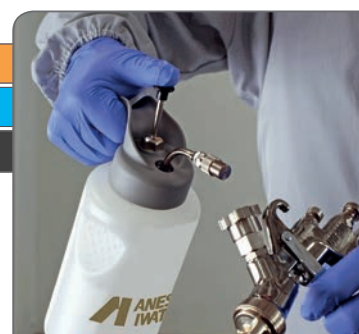

NEW

12.0
Cleaning Applicator

TECHNICAL DATA		PREMIUM Quality <i>Gold</i>	HIGH Quality <i>Silver</i>
Model		PCA12.0	HCA12.0
suitable for		- Mineral oil / petroleum products with acetone - alcohol (brake and engine cleaner)	- Mineral oil-based products - solvent - Release agent - Wax Products - Emulsions and higher viscosity products
material		Polyethylen transparent white	
gasket		BMS 2010 (black)	FKM Viton (green)
pump		nickel-plated brass	
type of nozzle		adjustable nozzle \varnothing 0.8 mm (nickel-plated brass)	
weight empty		310 g	
capacity		1 liter	
dimensions		250 mm (height), \varnothing 120 mm (opening)	
Max. operating pressure		12.0 bar	
temperaturerange		5° - 50° C	

ORDER INFORMATION

Code	Description
W2COM6226	PCA12.0 CLEANING APPLICATOR (BMS 2010 gaskets)
W2COM6225	HCA12.0 CLEANING APPLICATOR (FKM Viton gaskets)

Air duster guns

NEW

MINI



steel plug
nipple



safety quick coupling
Step 1: Bleeding
Step 2: Uncoupling



MINI Air duster gun

FEATURES

- MINI Air duster gun for dust, cleaning and drying of tools and workplaces
- compact and lightweight (made of the high-tech composite material of polyamide)
- robust for increased durability and insulation for a pleasant working temperature
- precise and powerful with high flow rate and low air consumption
- ergonomically designed and ultramodern
- max. operating pressure: 12.0bar; weight: 90 grams
- for even more user comfort: direct connection to the ANEST IWATA safety quick coupling over the steel plug nipple

**FITS
IN EACH
POCKET**



ORDER INFORMATION

Code	Description
DE510001	MINI Air duster gun
W3COM6085	SAFETY QUICK COUPLING NW 7,2; spout Ø 9mm

AG-6 Air duster gun

FEATURES

- conventional Air duster gun for dust, cleaning and drying of tools and workplaces
- weight: 185 grams



ORDER INFORMATION

Code	Description
13908061	AG-6 Air duster gun


Tipps for cleaning

CLEANING


DISASSEMBLY of atomizing parts



CLEANING & DRYING of spray gun

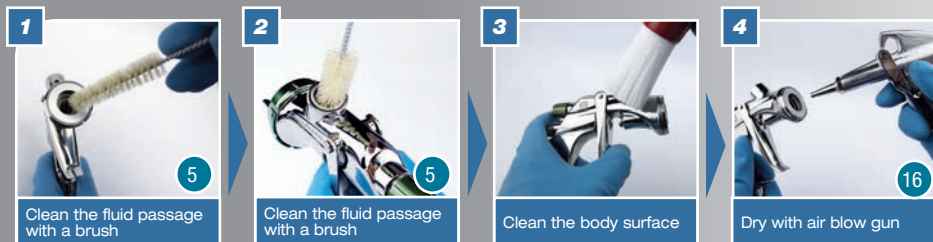


CLEANING of atomizing parts

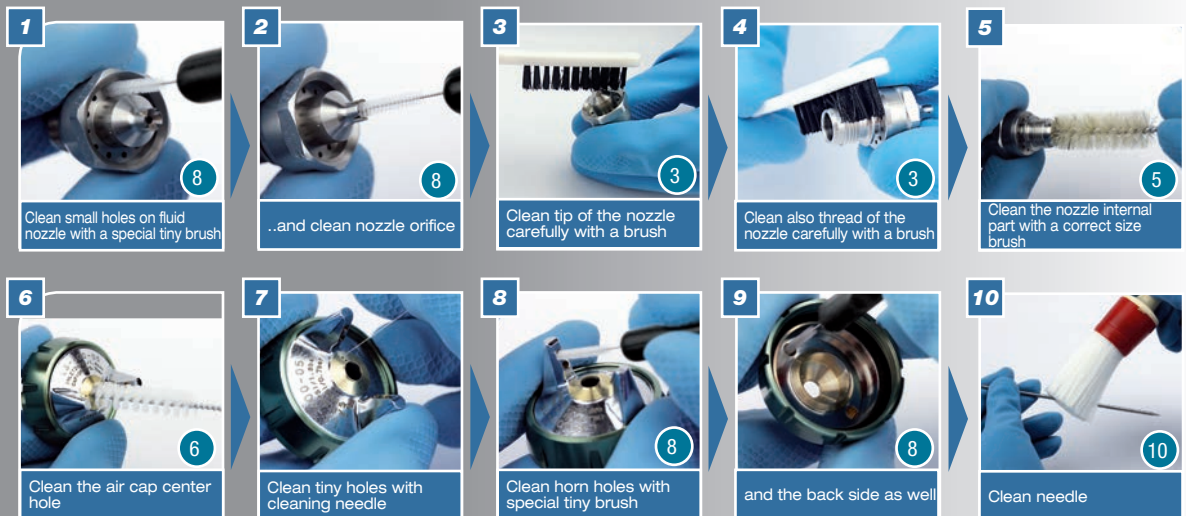

ASSEMBLY & MAINTENANCE

MAINTENANCE

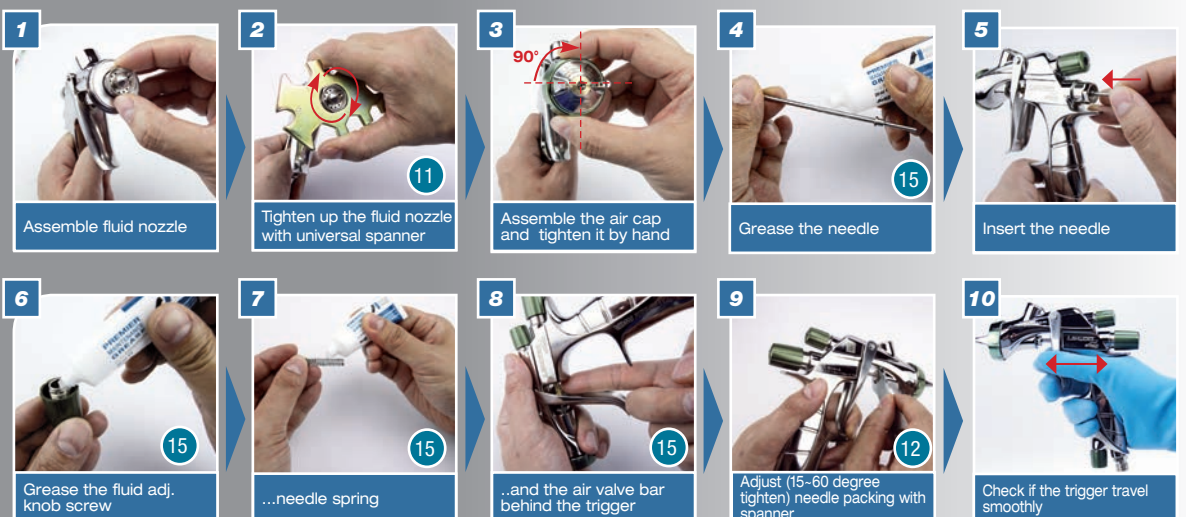

Spray gun maintenance kit I other cleaning tools

“All in one Box”



Spray gun maintenance Kit




Brush



Flat Brush



Surface Brush



Twisted Brush \varnothing 15mm



Twisted Brush \varnothing 10mm



Twisted Brush \varnothing 5mm



Tiny Twisted Brush



Very Tiny Twisted Brush



Nozzle Cleaning Needle



Spray gun maintenance kit includes

1 Surface Brush, 1 Brush, 1 Flat Brush,
3 Twisted Brushes (\varnothing 15mm, \varnothing 10mm, \varnothing 5mm),
1 Tiny Twisted Brush, 1 Very Tiny Twisted Brush,
12 Nozzle Cleaning Needles, Maintenance Grease

ORDER INFORMATION

Nr.	Code	Description	Qty.
1	W2KIT55UK	SPRAY GUN MAINTENANCE KIT	
2	W2COM6124	BRUSHES	(5 pcs./1pk.)
3	W2COM6163	FLATBRUSHES	(5 pcs./1pk.)
4	W2COM6125	SURFACE BRUSHES	(3 pcs./1pk.)
5	W2COM6126	TWISTED BRUSHES \varnothing 15mm	(5 pcs./1pk.)
6	W2COM6162	TWISTED BRUSHES \varnothing 10mm	(5 pcs./1pk.)
7	W2COM6161	TWISTED BRUSHES \varnothing 5mm	(5 pcs./1pk.)
8	W2COM6127	TINY TWISTED BRUSHES	(4 pcs./1pk.)
9	W2COM6128	VERY TINY TWISTED BRUSHES	(4 pcs./1pk.)
10	W2COM6164	NOZZLE CLEANING NEEDLES	(12 pcs./1pk.)
11	93505910	UNIVERSAL SPANNER	
12	W2COM6129	SPANNER FOR LOCK ADJ. & NEEDLE PACKING	
13	03506480K	ALLEN WRENCH for Supernova series	(3 pcs./1pk.)
14	93280881	SPANNER for LPH-80/RG-3L	
15	W2COM6165	MAINTENANCE GREASE	
16	13908061	AG-6 LUFTAUSBLASPISTOLE	

The bristles of all brushes are resistant to solvents and paint thinner and they are ideal to clean all types of spray guns.



Universal Spanner



Needle Packing Spanner



Allen Wrench



Spanner for LPH-80/RG-3L



Maintenance Grease



AG-6 Air Duster Gun

Gun washer



AIUD-800 Washer combination

FEATURES

- simultaneous automatic and manual cleaning possible [up to 3 spray guns: 2 automatic, 1 manual]
- manual cleaning using feed-through brush and fresh dilution jet
- automatic cleaning with timer
- sealed closing air-flush system of spray guns during automatic cleaning process
- includes automatic clear rise
- blow-out in deep drawn exhaust duct
- connector for use with blow gun
- all features are individually adjustable
- two mobile collecting trays for containers of 30, 58 and 60 litres - easy and fast to change, even with limited space
- weight: 75 kg
- dimension: (B x T x H) 750 x 600 x 1970 mm
- Ø exhaust pipe: 100 mm
- pneumatic energy supply: 6 bar

ORDER INFORMATION

Code	Description
10400BT02	AIUD-800 WASHER COMBINATION



AI-01 Compact gun cleaner

FEATURES

- used universally
- AI-01: for manual and automatic cleaning
- manual cleaning using feed-through brush and fresh dilution jet
- sealed closing air-flush system of spray guns during automatic cleaning process
- all features are individually adjustable
- available as wall mounting or plus base cabinet calvanized
- weight: 23 kg (wall mounting)
- weight: 17 kg (base cabinet calvanized)
- dimension: (B x T x H) 640 x 510 x 370 mm
- Ø exhaust pipe: 60 mm
- pneumatic energy supply: 6 bar

ORDER INFORMATION

Code	Description
10400BT01	AI-01 COMPACT GUN CLEANER
10400BT11	BASE CABINET CALVANIZED 7kg



Find all other gun cabinet washers in our separate catalogue.



TECHNICAL DATA

voltage	phase/s	frequency	amperage	kw
220/240	1	50 Hertz	12.5	3
380/415	3	50 Hertz	4.25	3

VID-3 series (3kw)

FEATURES

- mobile flexible infrared dryer on a robust stable steel frame (with rear locking)
- equipped with three 500 mm 1kw mirror control short waves lamps
- each of the cassettes can be individually horizontally or vertically be adjusted and fixed to a maximum area to achieve coverage around the vehicle
- cassettes are individually switchable
- cassettes with no fan or filter replacement (maintenance free)
- height adjustment is via a high-locking gas spring and offers an almost weightless movement of the swing arm
- standard equipped with a standard control system (Power: 0-100%, time: 0-30 min.)
- also available with distance sensor or distance and temperature sensor
- drying area: 1,35 m x 1,10 m*
- dimensions: 1,00 m x 1,00 m x 1,66 m/2,50 m
- available: XL version (2.70 m)

*Measurement at 500 mm distance

ORDER INFORMATION

VID-3 series	code 1 phase	code 3 phases
mobile infrared dryer	VID-3	VID-3-3P
mobile infrared dryer with distance sensor	VID-3-DS	VID-3-DS-3P
mobile infrared dryer with distance and temperature sensor	VID-3-DSTS	VID-3-DSTS-3P



TECHNICAL DATA

voltage	phase/s	frequency	amperage	kw
220/240	1	50 Hertz	26.1	6
380/415	3	50 Hertz	8.7	6

VID-6 series (6kw)

FEATURES

- mobile flexible infrared dryer on a robust stable steel frame (with rear locking)
- equipped with six 500 mm 1kw mirror control short waves lamps
- each of the cassettes can be individually horizontally or vertically be adjusted and fixed to a maximum area to achieve coverage around the vehicle
- cassettes are individually switchable
- cassettes with no fan or filter replacement (maintenance free)
- height adjustment is via a high-locking gas spring and offers an almost weightless movement of the swing arm
- standard equipped with a standard control system (Power: 0-100%, time: 0-30 min.)
- also available with distance sensor or distance and temperature sensor
- drying area: 2,60 m x 1,10 m*
- dimensions: 1,00 m x 1,00 m x 1,66 m/2,50 m
- available: XL version (2.70 m)

*Measurement at 500 mm distance

ORDER INFORMATION

VID-6 series	code 1 phase	code 3 phases
mobile infrared dryer	VID-6	VID-6-3P
mobile infrared dryer with distance sensor	VID-6-DS	VID-6-DS-3P
mobile infrared dryer with distance and temperature sensor	VID-6-DSTS	VID-6-DSTS-3P



Find all other Infrared units in our separate catalogue.

Cut Model of Supernova Series

LS-400
entech

**Super
nova™**

designed by *pininfarina*

100% stainless steel

All wetted parts are made of stainless steel.

Perfect balance

The angle of the cup has been designed with both disposable and standard cups in mind. The SUPERNOVA design guarantees perfect balance, even when using disposable cups which being wider and sometimes longer, could affect balance.

Fluid nozzle

The conical seal fluid nozzle promises cost savings for the purchase of consumables.


Quick and easy release cap

The air cap has a larger thread, making it both robust and easy to remove and has been designed with low maintenance in mind.

The larger slots in the air cap ring facilitate quick removal and refitting after cleaning.

Air Regulation

The air regulator allows to adjust the spray air.

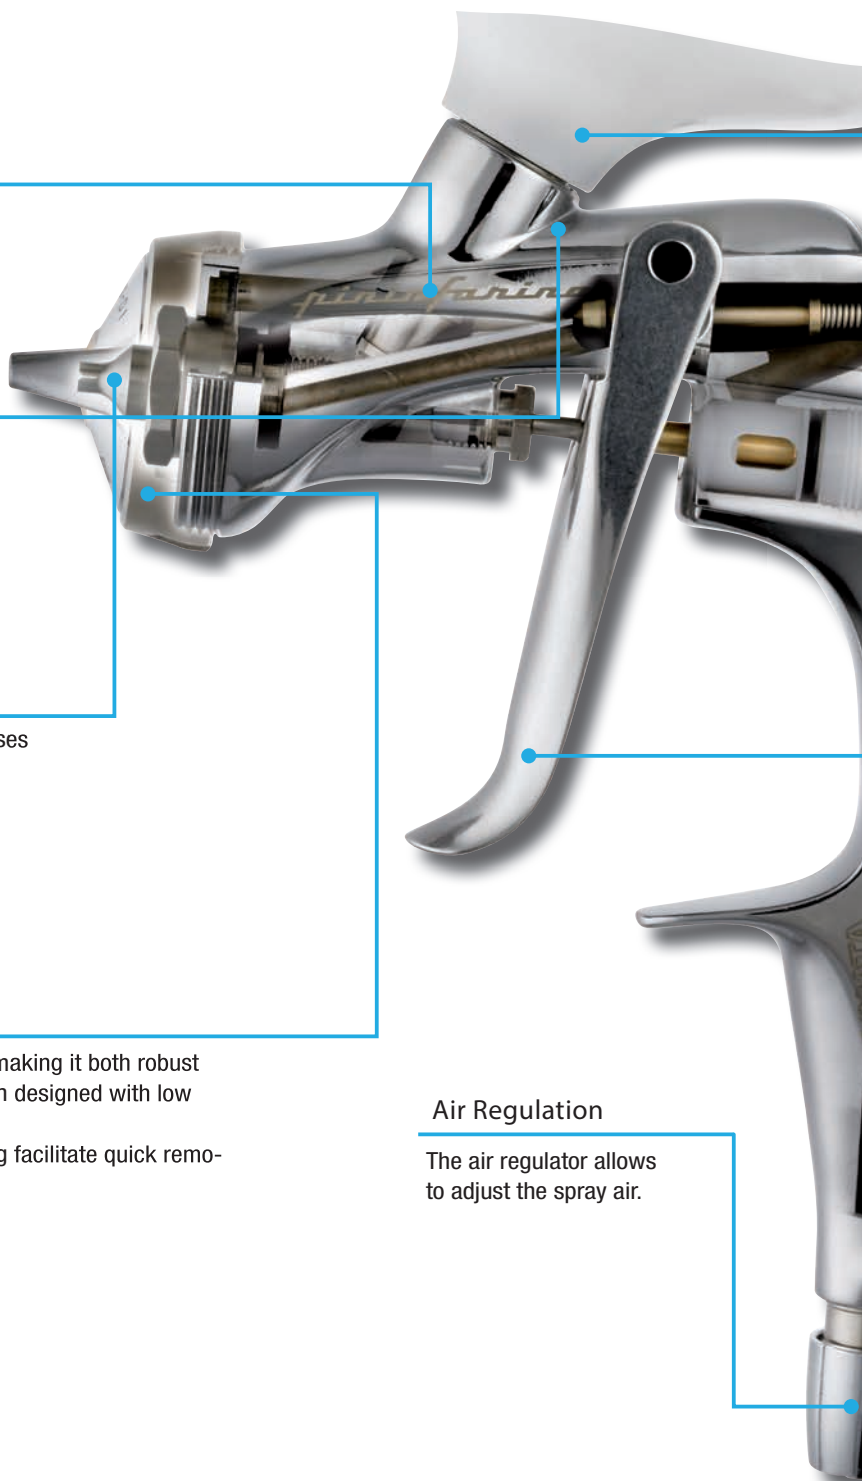

Cut Model of Supernova Series



Easy screw release paint cup system

The screw design fluid joint enables rapid screwing and unscrewing of the paint cup using only one hand.

Reliable and precise setting

SUPERNOVA spray guns are equipped with high precision adjustment controls for setting air, fluid and fan pattern. Moreover, the carefully designed grip gives the professional painter an easy feel, even when wearing latex gloves.



Coaxial air and fluid valve

The coaxial air and fluid valve ensures a precise control.

Responsive trigger action

The responsive trigger in stainless steel gives the user complete control.

Superior surface quality and ergonomic grip

The chrome-plated gun body ensures durability and easy cleaning. The slim ergonomic grip helps distribute weight and balance through the wrist, reducing the risk of repetitive strains.

Air nipple

G 1/4"



HEADQUARTERS:

ANEST IWATA Corporation
Yokohama - JAPAN
www.anest-iwata.co.jp

SALES OFFICES:

ANEST IWATA USA Inc.
West Chester - Ohio - U.S.A.
inquiry@anestiwata.com
www.anestiwata.com

ANEST IWATA DO BRASIL COMERCIAL Ltda.
Sao Paulo - BRAZIL
contato@anest-iwata.net.br
www.anest-iwata.net.br

ANEST IWATA Coating Solutions Corporation
Yokohama - JAPAN
www.anest-iwataeu.co.jp

ANEST IWATA Russia LLC
Moscow - RUSSIA
tam@anestiwata.ru
www.anestiwata.ru

SOUTHEAST ASIA CO. Ltd.
Bangkok - THAILAND
info@anest-iwata.co.th
<http://www.anest-iwatasoutheastasia.com>

ANEST IWATA Shanghai Corporation
Shanghai - CHINA
customer@anest-iwata-sh.com
www.anest-iwata-sh.com

ANEST IWATA Taiwan Corporation
Hu-Kuo - TAIWAN R.O.C.
service@anestiwata.com.tw
www.anestiwata.com.tw

ANEST IWATA Vietnam CO. Ltd.
Ho Chi Minh City- VIETNAM
info@anest-iwata.vn
www.anest-iwatasoutheastasia.com

PT. ANEST IWATA Indonesia
Jakarta - INDONESIA
www.anest-iwatasoutheastasia.com

ANEST IWATA Motherson Coating Equipment Ltd.
Noida - INDIA
sales@aim.motherson.com
www.motherson.com/anest-iwata-motherson.html

ANEST IWATA Middle East FZE
Dubai - UNITED ARAB EMIRATES
info@anest-iwata-me.com
www.anest-iwataeu.com

ANEST IWATA South Africa Pty Ltd.
Johannesburg - REPUBLIC OF SOUTH AFRICA
www.anest-iwata.co.za

ANEST IWATA Australia Pty Ltd.
Sidney - AUSTRALIA
info@anest-iwata.com.au
www.anest-iwata.com.au

EUROPEAN SALES OFFICES:

ANEST IWATA Italia S.r.l.
Torino - ITALY
info@anest-iwata.it
www.anest-iwata.it

ANEST IWATA Deutschland GmbH
Mommensenstr. 5, 04329 Leipzig - GERMANY
info@anest-iwata.de
www.anest-iwata.de
Tel. +49 341 241 44 30
Fax +49 341 252 55 95

ANEST IWATA France S.A.
Saint Quentin Fallavier, Lyon - FRANCE
info@anest-iwata.fr
www.anest-iwata.fr

ANEST IWATA U.K. Ltd.
St. Neots Cambridgeshire - ENGLAND
enquiries@anest-iwata.co.uk
www.anest-iwata.co.uk

ANEST IWATA Iberica S.L.
Badalona - Barcelona - SPAIN
info@anest-iwata.es
www.anest-iwata.es

ANEST IWATA Scandinavia AB.
Partille, Göteborg - SWEDEN
info@anest-iwata.se
www.anest-iwata.se

ANEST IWATA Polska Sp. Z o.o.
Poznań - POLAND
info@anestiwata.com.pl
www.anest-iwata.pl



**SPRAY GUNS &
ACCESSORIES FOR
CAR REFINISH**



www.anest-iwata.de



www.facebook.com/ANESTIWATADEUTSCHLAND